


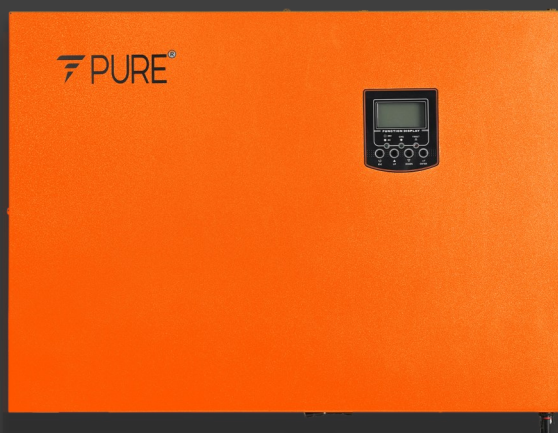

Model	PuREPower 3.0
Voltage	230 VAC
Transfer Time	10 ms
Usage	1 AC + All Other Hi Power Home Appliances
Output Signal Type	SPWM (Pure Sine Wave)
Surge Protection	2X
Back Up	Up to 6 Hours
Efficiency	97%
Life	12 Years (>2000 Cycles)
Connectivity	Mobile App/Wi- Fi
Aesthetics	State of the Art (Glossy/Matte Finish)
Solar Connection	Off Grid/Hybrid
Colour Options	White/Silver/Orange/Gold
IP Rating	IP 65
Warranty	5 Years
Extended Warranty	12 Years
Thermal Management	Advanced Nano PCM & forced convection
Net Weight (kg)	30
Dimensions (W x D x H) in mm	435 x 625 x 152
Mounting	Wall/Floor (Standard Accessories)
Environment	Indoor/Outdoor
Certifications	EN-IEC 60335-1, EN-IEC 60335-2-29, IEC 62109-1